


DCE (male BD-25)

DTE (female DB-25)

CAI/O

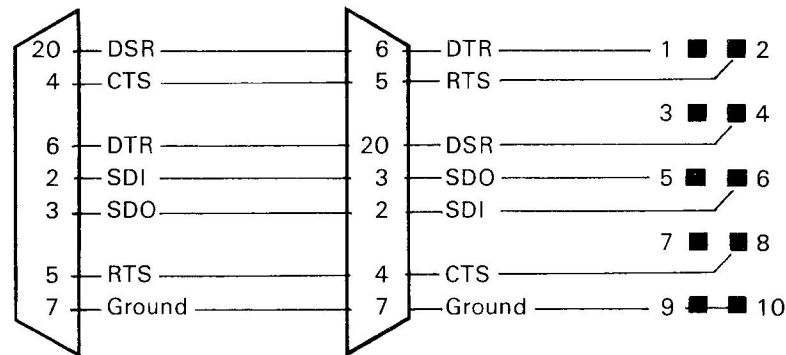

WARNING Do not connect the serial out lines to any circuits that are not capable of handling +12 and -12 volts. Please be advised that the serial I/O is not TTL compatible.

SIGNAL DISCRIPTIONS

Output signals

DTR Data Terminal Ready informs a MODEM or data set that your computer is ready to communicate.

RTS Request To Send informs a MODEM or data set that your computer is ready to send data.

SDO Serial Data Out is the signal with data being sent by your computer.

Input signals

SDI Serial Data In is from the peripheral device.

CTS Clear To Send is a MODEM control function input whose condition can be tested by the user before sending data.

DSR Data Set Ready indicates that the MODEM or data set is ready to establish communications.

